
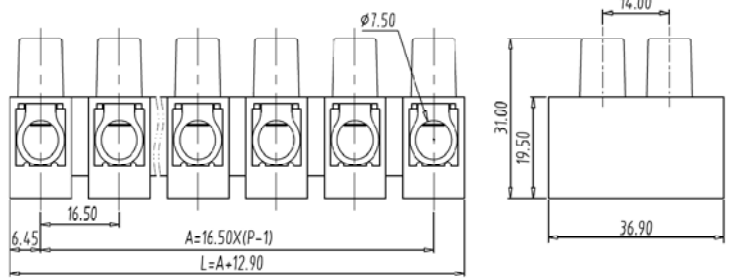


Terminal Strip — TLB series — TLB-600W

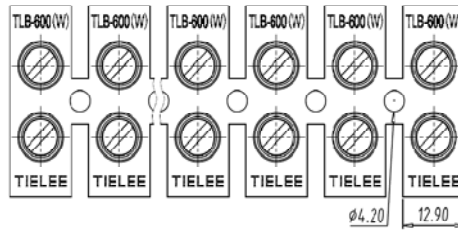


**图示(Pic. shown) : TLB-600W-04P-W03S**

General: Terminal Strip Rated : 750V, 101A , 25mm<sup>2</sup>  
16.50mm pitch , 02-12 Pole  
Wire-to-Wire Connection  
Screw clamp unit: M5.0, 2.5N.m Max

认证 ( Approval ) :   

技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	600V	600V	600V	--	750V	--
额定电流(Rated current)	85A	85A	5A	--	101A	--
额定连接容量(Rated connection capacity)	16-4AWG Sol&Str			4.0-25.0mm <sup>2</sup>		
绝缘材料(Insulation Material)	PA66 UL94 V-0					
电流承载部件材料和镀层( Material & Plating of Current carrier )	Copper alloy , Ni plated					
接线弹片材料(Material of Clamp spring )	Stainless					
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	2200V					
额定冲击电压(Rated surge voltage)	--					
接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )	M5.0 , 2.5N.m Max					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	12.0-13.0mm					
使用温度(Operating temperature)	-40°C up to +120°C(UL) / -40°C up to +100°C(VDE)					
焊接方式(Soldering recommend)	--					

**订购方式(How to order)**

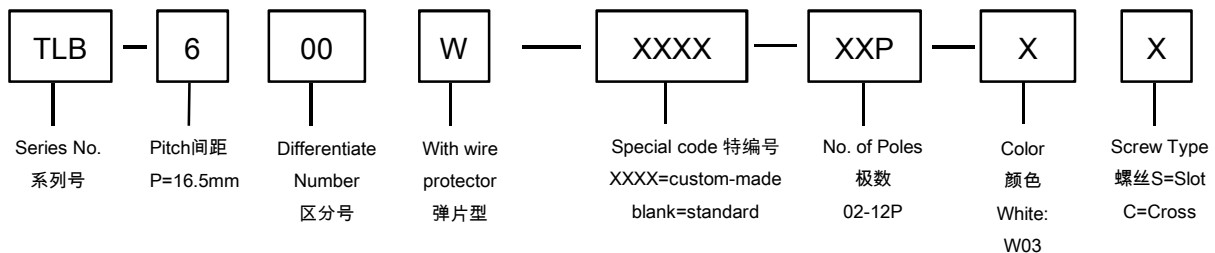

Web: [www.tielee.com/www.china-tianli.com/](http://www.tielee.com/www.china-tianli.com/) TEL: +86-574-6347-9600, 6389-6436 Mail : [sale@china-tianli.cn](mailto:sale@china-tianli.cn)

地址: 中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd., Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China