

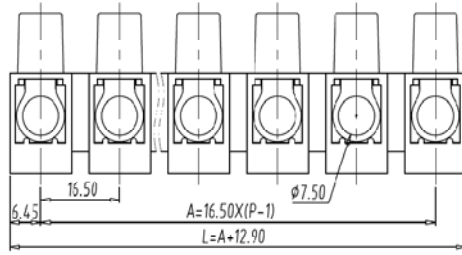


Terminal Strip — TLB series — TLB-600

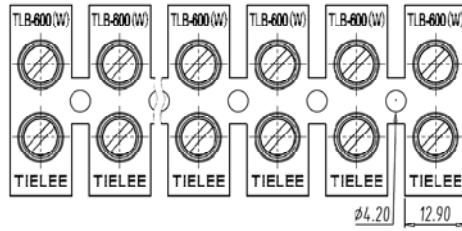

■ 图示(Pic. shown) : TLB-600-04P-W03S


General.	Terminal Strip Rated : 750V, 101A , 25.0mm ²
	16.50mm pitch , 02-12 Pole
	Wire-to-Wire Connection
	Screw clamp unit: M5.0 , 2.5N.m Max

认证 (Approval) :



技术参数 Technical Data	UL standard			IEC standard		
	UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	600V	600V	600V	--	750V	--
额定电流(Rated current)	85A	85A	5A	--	101A	--
额定连接容量(Rated connection capacity)	16-4AWG Sol&Str			4.0-25.0mm ²		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Ni plated		
接线弹片材料(Material of Clamp spring)				--		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				2200V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				M5.0 , 2.5N.m Max		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				12.0-13.0mm		
使用温度(Operating temperature)				-40°C up to +120°C(UL) / -40°C up to +100°C(VDE)		
焊接方式(Soldering recommend)				--		

■ 订购方式(How to order)

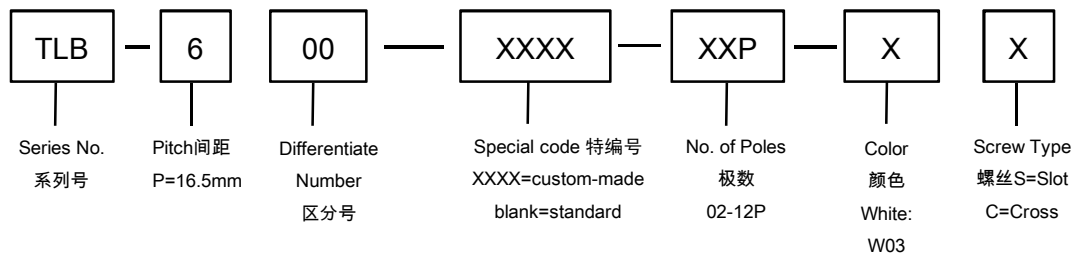

Web:www.tielee.com/www.china-tianli.com/ TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China